


Lincoln Hoist[®]

The Original. Since 1949.[®]

All New Model 3W15

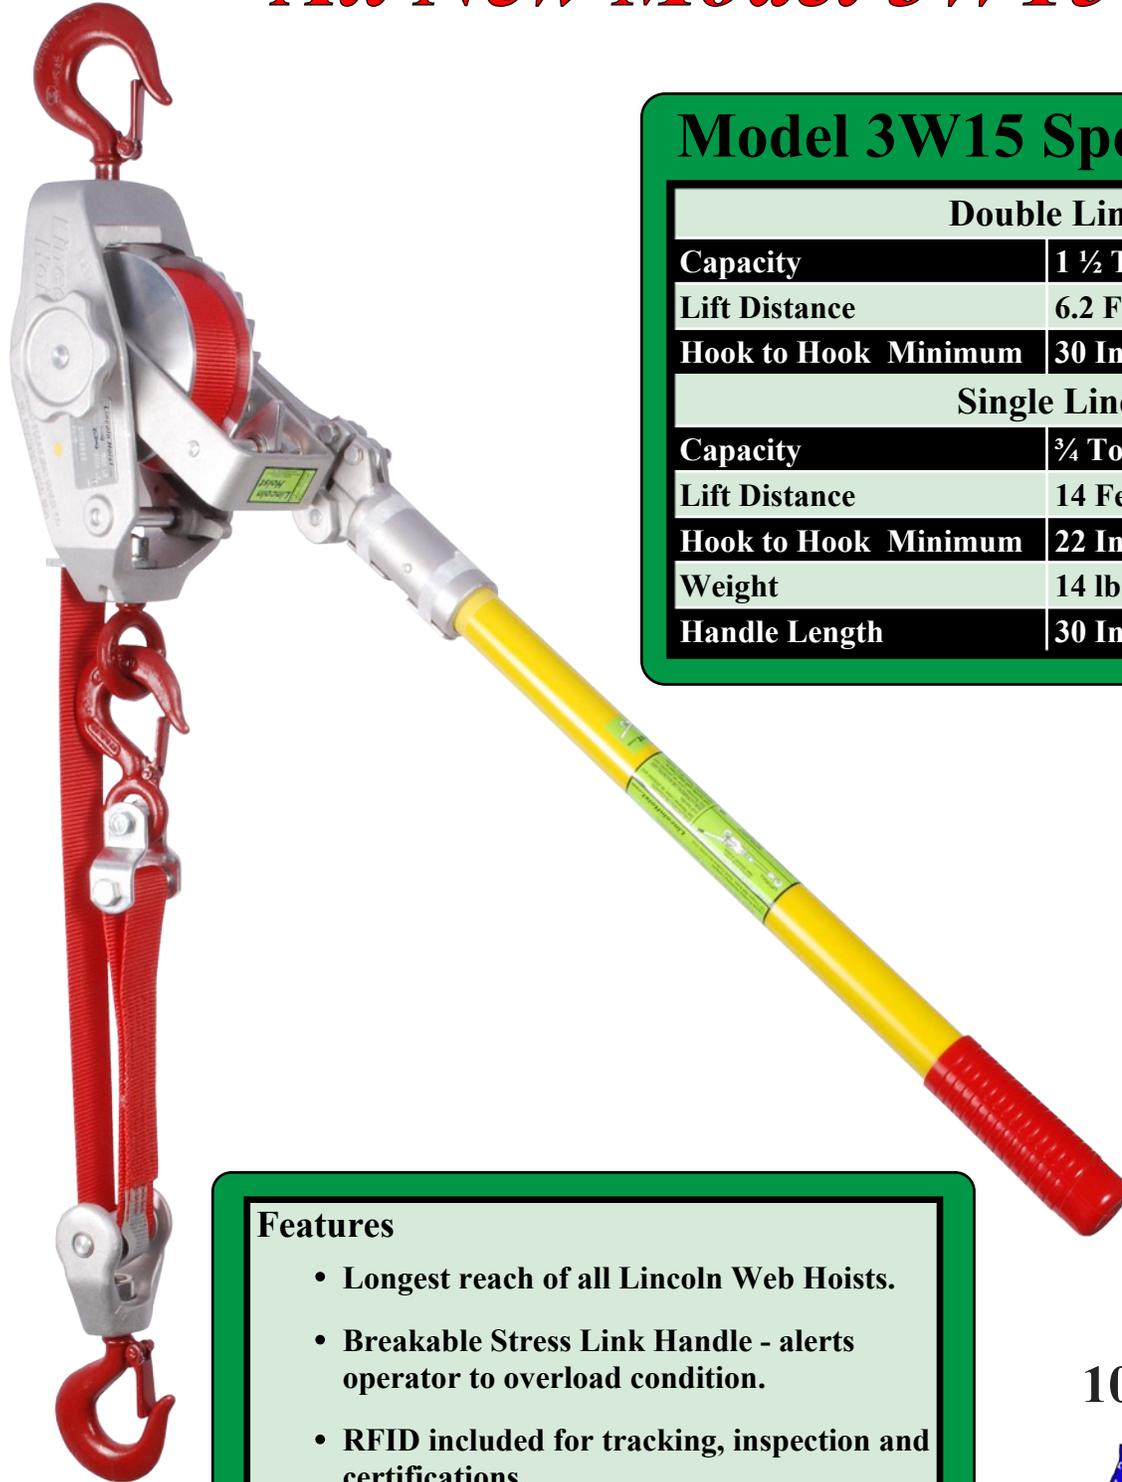

Model 3W15 Specifications

Double Line	
Capacity	1 ½ Ton - 3000 lbs.
Lift Distance	6.2 Feet
Hook to Hook Minimum	30 Inches
Single Line	
Capacity	¾ Ton - 1500 lbs.
Lift Distance	14 Feet
Hook to Hook Minimum	22 Inches
Weight	14 lbs.
Handle Length	30 Inches

Features

- Longest reach of all Lincoln Web Hoists.
- Breakable Stress Link Handle - alerts operator to overload condition.
- RFID included for tracking, inspection and certifications.
- Open frame for easy maintenance and inspection.

100% US Made



Hoist Options




"B" Option

This option adds hot stick rings to the hooks, pawl shafts and handle.

"L" Option

Lynch Pin Block
One pin pull to easily disassemble.

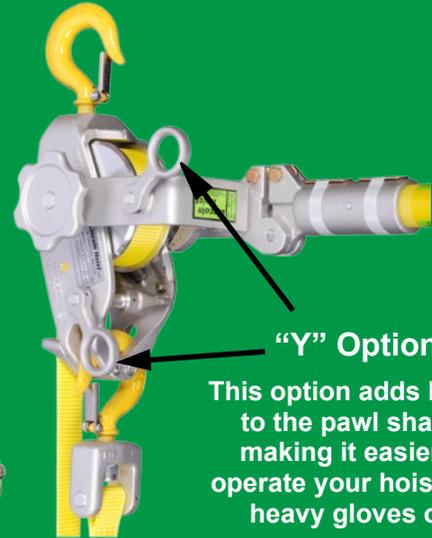

"Y" Option

This option adds levers to the pawl shafts, making it easier to operate your hoist with heavy gloves on.

Optional Hooks

These hooks are available on all web strap hoists, just add the letter suffix after the model number. This will get you that type of hook at all positions.

Example - 3W15 HB

U



B



HB



Hot stick hooks have a 1" welded ring for use with holding sticks.

Hot stick gate latch hooks have rings on the latch and hook.



WARNING



Overloading & Improper Use Can Result In Injury.

To Avoid Injury:

- Read and understand operators manual.
- Do not exceed working load limit.
- Do not use to lift people or loads over people.
- Use only **Lincoln Hoist**® replacement parts.

Cable Hoists

Made in the USA.

Models from 1000 to 6000 lb. Capacity.

Handle bends to alert operator of overload.

Four hook styles.

Rapid Lowering and Marine grade models available.



Lincoln Hoist®

Mfg. by Lincoln Precision Machining Company
121 Creeper Hill Road, P.O. Box 458, North Grafton, MA 01536
Toll Free (888) 306-7222 Phone (774) 551-9000 Fax (508) 839-4729
Email sales@lincolinhoist.com