

Cable Guide Replacement

- A. Using a cutoff wheel or hack saw, split the cable guide in two. As shown in fig. 1.
- B. Put one side of the cable guide in a vise and twist the main frame to give you access to the top of the other half. As shown in fig. 2.
- C. Use a hammer to drive one half of the cable guide out of the main frame. As shown in fig. 3.
- D. Using a punch, drive the other half of the cable guide out of the main frame. As shown in fig. 4.
- E. Using a hammer, drive the new cable guide in the main frame with the cable inside the legs of the cable guide (make sure the grooves in the cable guide face towards the eye bolt if using a part# 204).
- F. Using a center punch, drive the dimples on the main frame down to the cable guide.

Fig. 1



Fig. 2



Fig. 3

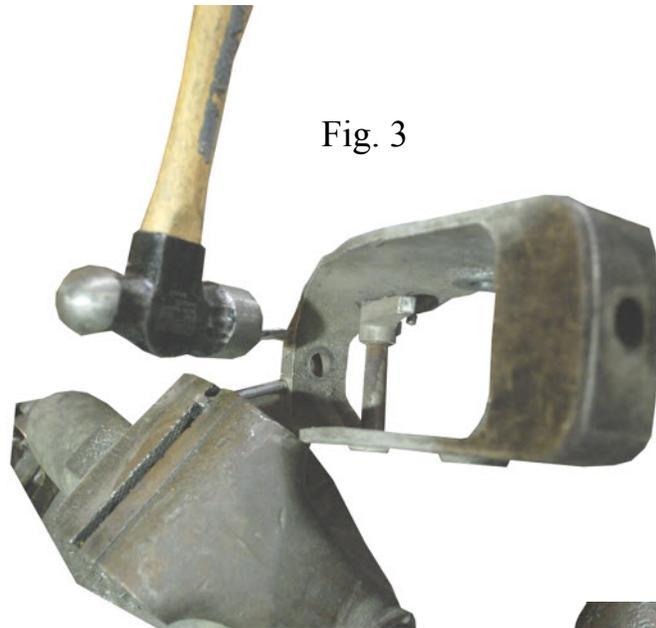


Fig. 4

